




# NTN BEARING MFG.CORP

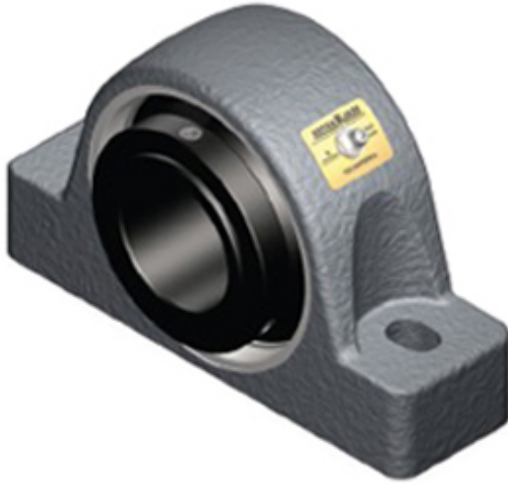

1.438 Inch | 36.525 Millimeter x 2.75 Inch | 69.85 Millimeter x 1.875 Inch | 47.63 Millimeter  
**SEALMASTER USRB5000-107 Pillow Block Bearings**

Bearing No. USRB5000-107

USRB5000-107 Bearing 2D drawings and 3D CAD models

|                           |  |
|---------------------------|--|
| Category                  | Pillow Block Bearings  |
| Inventory                 | 0.0  |
| Manufacturer Name         | REGAL BELOIT   |
| Minimum Buy Quantity      | N/A  |
| Weight                    | 3  |
| EAN                       | 0662461356418  |
| Product Group             | M06288   |
| Number of Mounting Holes  | 2  |
| Mounting Method           | Concentric Collar  |
| Housing Style             | 2 Bolt Pillow Block  |
| Rolling Element           | Spherical Roller Bearing   |
| Housing Material          | Cast Iron  |
| Expansion / Non-expansion | Non-expansion  |
| Mounting Bolts            | 1/2 Inch   |
| Relubricatable            | Yes  |
| Insert Part Number        | USI5000-107  |
| Seals                     | Felt Labyrinth   |
| Housing Configuration     | 1 Piece Solid  |
| Inch - Metric             | Inch   |
| Other Features            | Double Row   Has Flinger   With Set Screw  |
| Long Description          | 2 Bolt Pillow Block; 1-7/16" Bore; 1-7/8" Base to Center Height; Concentric Collar Mount; Spherical Roller |



## NTN BEARING MFG.CORP

|                               |   |
|-------------------------------|---|
|                               | Bearing; 4-11/16" Minimum Bolt Spacing; 5-5/16" Bolt Spacing Maximum; Rel |
| Category                      | Pillow Block  |
| UNSPSC                        | 31171511  |
| Harmonized Tariff Code        | 8483.20.40.80   |
| Noun                          | Bearing   |
| Keyword String                | Pillow Block  |
| Manufacturer URL              | <a href="http://www.emerson-ept.com">http://www.emerson-ept.com</a>       |
| Manufacturer Item Number      | USRB5000-107  |
| Manufacturer Internal Number  | 737006  |
| Weight / LBS                  | 6.6   |
| d                             | 1.438 Inch   36.525 Millimeter  |
| B                             | 1.875 Inch   47.63 Millimeter   |
| Bolt Spacing Minimum          | 4.688 Inch   119.075 Millimeter   |
| D                             | 2.75 Inch   69.85 Millimeter  |
| Bolt Spacing Maximum          | 5.313 Inch   134.95 Millimeter  |
| Nominal Bolt Center to Center | 5 Inch   127 Millimeter   |
| Actual Bolt Center to Center  | 0 Inch   0 Millimeter   |